

66/18/99
U.S. PTO
10595

Please type a plus sign (+) inside this box →

Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 501.34424CX1

Total Pages 66

First Named Inventor or Application Identifier

MURAYAMA, et al

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

JCS/DP
USPTO
05/18/99
PRO
10595
N

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. Fee: 760.00

Please charge any shortages in the fees or credit any over-payments therof to the deposit account of Antonelli, Terry, Stout & Kraus, Deposit Account No. 01-2135.

6. Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. Computer Readable Copy
- b. Paper Copy (identical to computer copy)
- c. Statement verifying identity of above copies

2. Specification Total Pages [48]

3. Drawing(s) (35 USC 113) [Total Sheets [9]]

4. Oath or Declaration Total Pages [2]

a. Newly executed (original or copy)

b. Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
(Note Box 5 below)

i. DELETION OF INVENTOR(S)

Signed statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).

5. Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a
copy of the oath or declaration is supplied under Box 4b,
is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein.

ACCOMPANYING APPLICATION PARTS

8. Assignment Papers (cover sheet & document(s))

9. 37 CFR 3.73(b) Statement [when there is an assignee] Power of Attorney

10. English Translation Document (if applicable)

11. Information Disclosure Statement (IDS)/PTO-1449 Copies of IDS Citations

12. Preliminary Amendment

13. Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. Small Entity Statement filed in prior application
Statement(s) Status still proper and desired

15. Certified Copy of Priority Document(s)
(If foreign priority is claimed)

16. Other:

.....

.....

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

Continuation Divisional Continuation-in-part (CIP) of prior application No: 08 / 670,757

18. CORRESPONDENCE ADDRESS

Customer Number or Bar Code Label

020457

(Insert Customer No. or Attach bar code label here)

11. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Carl T. Brundidge
------	-------------------

SIGNATURE

DATE

May 18, 1999

REG. NO.

29,621

ANTONELLI, TERRY, STOUT & KRAUS, LLP

SUITE 1800

1300 NORTH SEVENTEENTH STREET
ARLINGTON, VIRGINIA 22209

TELEPHONE
(703) 312-6600
FACSIMILE
(703) 312-6666
E-MAIL
email@antonelli.com

501.34424CX1

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): MURAYAMA, et al

Serial No.: Not yet assigned

Filed: May 18, 1999

For: A COMPUTER SYSTEM HAVING A PLURALITY OF COMPUTERS EACH PROVIDING A SHARED STORAGE ACCESS PROCESSING MECHANISM FOR CONTROLLING LOCAL/REMOTE ACCESS TO SHARED STORAGE DEVICES
(Amended)

Group: 2756

Examiner: I. Pierce

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

May 18, 1999

Sir:

The following amendments and remarks are respectfully submitted prior to the Rule 53(b) Continuation Application filed on even date.

IN THE TITLE

Please replace the original title of the invention with the following new title: --A COMPUTER SYSTEM HAVING A PLURALITY OF COMPUTERS EACH PROVIDING A SHARED STORAGE ACCESS PROCESSING MECHANISM FOR CONTROLLING LOCAL/REMOTE ACCESS TO SHARED STORAGE DEVICES--

IN THE SPECIFICATION

Please insert before the first line of the specification the following:

-- This is a continuation of application Serial No.
08/670,757, filed June 21, 1996. --

IN THE CLAIMS

Please cancel claims 2-87 without prejudice or disclaimer
of the subject matter thereof.


REMARKS

Entry of the above amendments is respectfully requested.

Please charge any shortage in fees due in connection with
the filing of this paper, or credit any overpayment of fees,
to the deposit account of Antonelli, Terry, Stout & Kraus,
LLP, Deposit Account No. 01-2135 (501.34424CX1).

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP

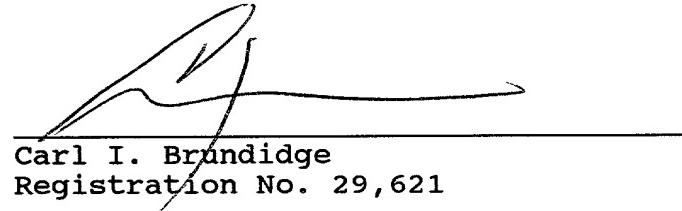

Carl I. Brundidge
Registration No. 29,621

CIB/jdc
(703) 312-6600

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor: Hideki MURAYAMA, Hiroshi YASHIRO, Satoshi YOSHIZAWA, Kazuo HORIKAWA, Takehisa HAYASHI, Hiroshi IWAMOTO and Kimitoshi YAMADA

Invention: A COMPUTER SYSTEM HAVING A PLURALITY OF COMPUTERS EACH CONTROLLING ACCESS TO SHARED MEMORY BASED ON STRUCTURAL DEFINITION INFORMATION

Antonelli, Terry, Stout & Kraus
Suite 1800
1300 North 17th Street
Arlington, VA 22209

SPECIFICATION

To All Whom It May Concern:

Be it known that We, Hideki MURAYAMA, Hiroshi YASHIRO, Satoshi YOSHIZAWA, Kazuo HORIKAWA, Takehisa HAYASHI, Hiroshi IWAMOTO and Kimitoshi YAMADA have invented new and useful improvements in:

A COMPUTER SYSTEM HAVING A
PLURALITY OF COMPUTERS EACH CONTROLLING ACCESS
TO SHARED MEMORY BASED ON STRUCTURAL DEFINITION INFORMATION

A COMPUTER SYSTEM HAVING A
PLURALITY OF COMPUTERS EACH CONTROLLING ACCESS
TO SHARED MEMORY BASED ON STRUCTURAL DEFINITION INFORMATION

5 BACKGROUND OF THE INVENTION

The present invention relates to a computer system having a plurality of computer systems connected to each other. More particularly, the present invention relates to a computer system having a plurality of computers connected to each other, wherein each computer controls access to a shared memory based on structural definition information which describes a structure of the computer system and wherein the computer system may be a loosely-coupled computer system.

Loosely-coupled computer systems which share hard disks so as to share data have been proposed. In order to implement such systems a plurality of hard disk controllers and an attachment for connecting hard disks to be shared are required.

Examples of apparatus for implementing hard disk sharing by SCSI Profile of Fibre Channel is described in The VAXcluster Concept: An Overview of a Distributed System, by Nancy P. Kronenberg et. al., Digital Technical Journal, No.5 September 1987, pp 7-21, and examples of apparatus for implementing Fibre Channel Small Computer System Interface (SCSI) Profile which has been standardized in ANSI, is described in Implementing a Fibre Channel SCSI Transport, by Robert Snively, IEEE COMPCON, Spring 1994, pp 78-82 have been proposed.

Examples of apparatus implementing a Network File

System (NFS) is described in DISTRIBUTED SYSTEMS, by George F. Coulouris et. al., pp 391-407, 1991 as a means for realizing file sharing by Remote Procedure Call (RPC) in a loosely-coupled computer system has also been proposed.

5 In Fibre Channel, when the shared hard disks are accessed, access is required to be conducted through the attachment. Thus, the increased access to the attachment causes the reduction of performance, the performance reduction is a serous disadvantage.

10 A System is a system which uses other processors for performing processing operations based upon the request of another processor. RPC provides for communications between processors to cause other processors to execute processing for another processor. Thus, soft overhead increases. Increased soft overhead causes a reduction in the performance of the system. The reduced performance is a disadvantage.

SUMMARY OF THE INVENTION

It is the object of the present invention to provide
20 a computer system in which a processor directly controls shared hard disks through an attachment so as to provide high performance hard disk sharing, wherein the computer system may be a loosely-coupled computer system.

Another object of the present invention is to provide
25 a loosely-coupled computer system having a plurality of computers connected to each other, wherein each computer controls access to a shared memory based on structural definition information which describes a structure of the

computer system, wherein the computer system may be a loosely-coupled computer system.

The present invention provides a computer system having a plurality of computers connected to each other, wherein each of the computers is connected to a shared memory device. Each computer includes a controller for controlling access from the computer to the shared memory device connected to the computer and permitting access to the shared memory device from another computer in response to a processing requirement from the other computer. The controller in each computer permits access to the shared memory device based on structural definition information which describes a structure of the computer system. The computer system may be a loosely-coupled computer system.

Further, the present invention provides a computer system, which is structured so that a processor required for hard disk access controls directly the hard disk. The processor is also provided with a requirement judging section for judging a hard disk processing requirement from another processor, a hard disk requirement processing section for processing the processing requirement, and a remote disk controlling section for transferring as required the processed requirement between the processor connected to the hard disk and an attachment for remote access by the other computer.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more apparent from the following detailed description, when taken in conjunction with

the accompanying drawings, in which:

Fig. 1 is a block diagram of the first embodiment of
a loosely-coupled computer system structure;

5 Fig. 2 is a block diagram of the second embodiment of
a loosely-coupled computer system structure;

Fig. 3 is a conceptual diagram of an example of
structural definition information;

Fig. 4 is a conceptual diagram of an example of disk
processing requirement command;

10 Fig. 5 is a conceptual diagram of an example of disk
processing status;

Fig. 6 is a conceptual diagram of an example of
computer coupling mechanism adapter packet;

15 Fig. 7 is a conceptual diagram of an example of
remote disk processing requirement command;

Fig. 8 is a conceptual diagram of an example of
remote disk processing status;

Fig. 9 is a conceptual diagram of an example of
actual disk processing requirement command;

20 Fig. 10 is a conceptual diagram of an example of
actual disk processing status;

Fig. 11 is an operation flow chart of the disk
requirement processing section;

25 Fig. 12 is a flow chart of the non-remote requirement
processing;

Fig. 13 is a flow chart of the remote requirement
processing;

Fig. 14 is a flow chart of the remote requirement

actual disk processing;

Fig. 15 is a block diagram of the disk control mechanism sharing control section;

Fig. 16 is a flow chart of the remote requirement refusing processing.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention will be described referring to the drawings.

A first embodiment of a computer system of the present invention is shown in Fig. 1. The computer system illustrated in Fig. 1 may be a loosely-coupled computer system which is structured from computers 100-1 to 100-N coupled to each other by a computer coupling mechanism 140 (N is a natural number hereinafter). Each of the computers 100-1 to 100-N comprises a processor 101, memory 102, I/O device 103, disk control mechanism 104, computer coupling network adapter 130, and disk requirement processing section 110, which are connected to a system bus 105, and a disk 106-1 to 106-N connected to a disk control mechanism 104. The processor 101 comprises, for example, a CPU. The memory comprises, for example, a RAM. The I/O device 103 is a device for input and output, and comprises a secondary memory associated with, for example, a display, keyboard, and hard disk. The I/O device 103 may not necessarily be contained as an element of a computer 100-1 to 100-N in a case where communication processing by the computer coupling network adapter 130 executes the input-output function.

The disk control mechanism 104 is a mechanism for controlling the disk 106-1 to 106-N responding to a processing requirement from the disk requirement processing section 110, and, for example, comprises logic such as TTL and CMOS. The 5 disks 106-1 to 106-N each comprises a secondary memory such as a hard disk.

The computer coupling network adapter 130 is a device for coupling computers 100-1 to 100-N and the computer coupling mechanism 140 to each other and performing 10 transmitting-receiving processing of data in responding to an indication from the processor 101 and disk requirement processing section 110, and, for example, logic such as TTL and CMOS. The computer coupling mechanism 140 is a coupling network for coupling the computers 100-1 to 100-N to communicate to each other. The computer coupling mechanism 15 140, for example, comprises logic such as TTL and CMOS. The computer coupling mechanism can also take the form of a network or any other type of connection or coupling apparatus such as a bus, a switch or plural switches, an exchange or switching 20 system for example an Asynchronous Transfer Mode (ATM) switching system. The computer coupling mechanism can also be a Small Computer System Interface (SCSI). A SCSI can also be used to connect the disk control mechanism 104 to the disk 106-1 to 106-N.

25 The disk requirement processing section 110 performs communication between the disk requirement processing sections 110 through the computer adapter 105 and computer coupling mechanism 140 as required and responds to a processing

requirement from the processor 101 to the corresponding disk control mechanism 104. The disk requirement processing section 110 responds to the processing requirement instead of the disk control mechanism 104. Thus, the processor 101 can control the access to the disk 106-1 to 106-N in the same access control procedure. The disks from 106-1 to 106-N can be shared only when sharing is needed, therefore, the computer coupling mechanism 140 will not impact on the performance of the computer.

Next, details of a disk requirement section 110 are described. A disk requirement processing section 110 receives two types of processing requirements, namely a processing requirement from the processor 101 in the same computer and a remote processing requirement from the other computers from 100-1 to 100-N connected through the computer coupling mechanism 140. The disk requirement processing section 110 performs two types of control processing operations, namely control of the disk control mechanism 104 in the same computer and issue of remote control requirement to other computers from 100-1 to 100-N connected through the computer coupling mechanism 140. The disk requirement processing section 110 comprises a requirement control section 111, requirement acceptance judging section 112, required designee judging section 113, structural definition information holding section 114, disk control mechanism sharing control section 115, and remote disk control section 120, which components are connected to the internal bus 116.

The requirement control section 111 receives a

processing requirement from the processor 101 in the same computer requiring processing of the disk control mechanism 104 and a remote processing requirement from other computers connected through the computer coupling mechanism 140 and 5 performs the requested processing requirements. The requirement control section 111, for example, comprises logic such as TTL and CMOS.

The requirement acceptance judging section 112 judges acceptance of the processing requirement received by the disk requirement processing section 110 based on the structural definition information stored in the structural definition information holding section 114. The requirement acceptance judging section 112, for example, comprises logic such as TTL and CMOS.

15 The required designee judging section 113 judges to determine which of a computer and disk are to be assigned to perform the processing requirement received by the disk requirement processing section 110 based on the structural definition information stored in the structural definition information holding section 114. The received designee judging section 113, for example, comprises logic such as TTL and CMOS.

20 The structural definition information holding section 114 stores structural definition information which describes a structure of the computer system. Particularly, the structural definition information is used to determine whether the sender 25 of the processing requirement has access right to the corresponding disk, and whether a predetermined password has been provided for improvement of security.

The disk control mechanism sharing control section 115 performs an adjustment between two types of processing requirements, namely a processing requirement from the processor 101 in the same computer to the disk control mechanism 104 and remote processing requirement from the other computers connected through the computer coupling mechanism 140. The disk control mechanism and, for example, comprises logic such as TTL and CMOS.

The remote disk control section 120 controls the disk control mechanism 104 in response to a remote processing requirement from one of the other computers connected through the computer coupling mechanism 140 and issues remote control requirements to the computers connected through the computer coupling mechanism 140.

The remote disk control section 120 comprises a remote requirement processing section 121, a remote requirement issue section 122, and a computer coupling mechanism adapter control section 123, which are connected to the internal bus 124.

The remote requirement processing section 121 performs processing of a remote processing requirement from the other computers connected through the computer coupling mechanism 140. The remote requirement processing section 121, for example, comprises logic such as TTL and CMOS. The remote requirement issue section 122 issues remote control requirements to other computers connected through the computer coupling mechanism 140. The remote requirement issue section 122, for example, comprises a logic such as TTL and CMOS.

The computer coupling mechanism adapter control section 123 controls the computer coupling mechanism adapter 105 to communicate to other computers connected through the computer coupling mechanism 140. The computer coupling mechanism adapter control section 123, for example, comprises logic such as TTL and CMOS.

In Fig. 2, another embodiment of a loosely-coupled computer system structure is illustrated. Fig. 2 illustrates an example in which three computers and disks connected to each computer are shared partially. The computer-1 100-1 has disks 106-1, ID = A, B, and C where ID represents identifiers in each computer. The disks 106-1, ID = A and B are non-shared disks. The disk 106-1, ID = C is a disk shared by the computer-1 100-1 and the computer-2 100-2.

The computer-2 100-2 has disks 106-2, ID = A and B. The disk 106-2, ID = A is non-shared disk, and the disk 106-2, ID = B is a disk shared by the computer-2 100-2 and the computer-3 100-3. The computer-3 100-3 has disks 106-3, ID = A, B, and C. The disk 106-3, ID = A is non-shared disk, and the disks 106-3, ID = B and C are disks shared by the computer-1 100-1, computer-2 100-2 and computer-3 100-3.

Table 1 shows an example of structural definition information corresponding to the loosely-coupled computer system structure embodiment 2. The structural definition information is information for representing structural definition such as what computer and disk correspond to the processing required to the disk requirement processing section 110, whether the requirer of the requirement has the access

right corresponding to the disk, and password for improving security. The information is structured in a form of table. The virtual disk is a virtual name of a disk designated by processing command issued from the processor 101. In this example, total eight disks are contained in the whole loosely-coupled computer system, and a disk is designated using identifiers from VDISK-1 to VDISK-8.

Table 1

Virtual Disk	Actual Disk Control Computer	Corresponding Disk in Controlled Computer	Access Right Information	Password
VDISK-1	Computer-1	A	Computer-1	ABC
VDISK-2	Computer-2	A	Computer-2	BCD
VDISK-3	Computer-3	A	Computer-3	CDE
VDISK-4	Computer-3	C	Computer-1, computer-2, computer-3	DEF
VDISK-5	Computer-3	B	Computer-1, Computer-2, Computer-3	EFG
VDISK-6	Computer-2	B	Computer-2 Computer-3	FGH
VDISK-7	Computer-1	B	Computer-1	GHI
VDISK-8	Computer-1	C	Computer-1 Computer-2	HIJ

The actual disk control computer represents a

computer from 100-1 to 100-3 to which the disk control mechanism 104 for controlling a target disk from 106-1 to 106-3 of actual issue of processing command.

The corresponding disk in a control computer
5 represents a disk from 106-1 to 106-3 in the actual disk control computer corresponding to the virtual disk. This disk is referred to as actual disk hereinafter. In this embodiment, it is shown that the control computer is contained in a form of identifier (ID) for controlling disks. The access right
10 information tells that an access from which computer is permitted for each virtual disk. In this example, the access right information is identifiers (ID) of the computers for permitting access. The access right information may be stored individually for each processing command such as data reading, data writing, and status reading. The password is used to
15 improve security. For example, password may be checked for all requirements to improve reliability.

If only a single requirement corresponding to a specific process out of a plurality of requirements from a
20 computer having the access right should be permitted access, a password is added to each of the requirements and checked to improve security.

An example of structural definition information corresponding to the computer-1 in the loosely-coupled computer
25 system structure embodiment 2 is shown. As the structural definition information, the information which shows the correspondence of each computer to the actual disk control computer allows the computer to identify the virtual disk which

accepts an access without interpolation of the computer coupling mechanism.

Information shown in Table 1 and Fig. 3 is stored in the external secondary memory device and it may be set when 5 initialization is processed. Otherwise, it is set during operation by a utility tool.

In Fig. 4, an example of a disk processing requirement command issued from the processor 101 is shown. 400 is a disk requirement command. The virtual disk ID 401 is 10 an identifier for designating a disk in the system. The password 402 is necessary for password checking as shown in 15 Fig. 3. The disk control command/data 403 is a command for controlling disks from 106-1 to 106-N, and data necessary for executing the command, and it is issued through the disk control mechanism 104.

In Fig. 5, an example of a disk processing status which is returned to the processor 101 when disk processing is completed. 500 is the disk processing status. The virtual disk ID 401 is the same as the virtual disk ID 401 in Fig. 4. 20 The password 502 is the same as the password 502 in Fig. 4, but, may not be used when returning. The disk status/data is a status information and data at the end of the command which is returned from the disk from 106-1 to 106-N to the processor 101.

25 In Fig. 6, an example of a computer coupling mechanism adapter packet. The computer coupling mechanism performs distribution of packets. The transmission side computer ID 601 is an identifier representing a computer of

transmission side. The receiving side computer ID 602 is an identifier representing a computer of receiving side. The data 603 are data which is transferred. It is preferable to add redundant codes for improvement of reliability on the head or 5 tail of a packet to improve reliability. It is also preferable to symbolize a packet to improve security.

In Fig. 7, an example of a remote disk processing requirement command is shown. 700 is a remote disk processing requirement command. The requirer computer ID 701 is an 10 identifier which represents a computer requiring processing to the disk. The actual disk control computer ID 702 is an identifier representing a computer which stores the disk control mechanism 104 controlling directly the computer required for processing of the disk. The actual disk ID 703 is an identifier representing the disk to be processed. The password 402 and disk control command/data 403 are the same 15 command as described in Fig. 4.

In Fig. 8, an example of a remote disk processing status is shown. 800 is a remote disk processing status. The requirer computer ID 701 is an identifier representing the 20 computer which requires processing of the disk, and it is the same command as described in Fig. 7. The actual disk control computer ID 702 is an identifier representing the computer which has the disk control mechanism 104 for controlling 25 directly the disk to be processed, and it is the same command as described in Fig. 7. The actual disk ID 703 is an identifier representing the disk to be processed, it is the same command as described in Fig. 7. The password 502 and disk

status/data 503 are the same commands as described in Fig. 5.

In Fig. 9, an example of actual disk processing requirement command is shown. 900 is an actual disk processing requirement command. The actual disk ID 703 is an identifier representing the disk to be processed, it is the same command as described in Fig. 7. The disk control command/data 403 is a command for controlling the disk from 106-1 to 106-N and data necessary for execution of the command. The actual disk processing requirement command is the same command as described in Fig. 4.

In Fig. 10, an example of an actual disk processing status is shown. 1000 is an actual disk processing status. The actual disk ID 703 is an identifier representing the disk to be processed, and it is the same command as described in Fig. 7. The disk status/data 503 is status information at the end of a command which is returned to the processor 101 from the disk from 106-1 to 106-N and data. It is the same command as described in Fig. 5.

A flow of operation of the disk requirement processing section is described referring to Fig. 11. First, as shown in the step 1110, a disk processing requirement command issued from the processor 101 is received by the requirement control section 111 and the flow proceeds to the step 1120.

As shown in the step 1120, the required disk judging section 113 judges an actual disk control computer (refer to Table 1) corresponding to the virtual disk ID 401 referring to the structural definition information (refer to Table 1) stored

in the structural definition information holding section 114, and the flow proceeds to step 1130.

Step 1130 judges whether the actual disk control computer corresponding to the virtual disk ID 401 is identical to the processor 101 which issued the disk processing requirement command referring to the structural definition information (refer to Table 1 and Fig. 3). If the actual disk control computer corresponding to the virtual disk ID 401 is not identical to the processor 101 which issued the disk processing requirement command, the flow proceeds to the branched step 1140, on the other hand, if the actual disk control computer corresponding to the virtual disk ID 401 is identical to the processor 101 which issued the disk processing requirement command, the flow proceeds to the branched step 1150.

If the actual disk control computer corresponding to the virtual disk ID 401 is not identical to the processor 101 which issued the disk processing requirement command, a remote requirement processing operation is executed as shown in the step 1140.

The remote requirement processing operation is described referring to Fig. 13 and Fig. 14. If the actual disk control computer corresponding to the virtual disk ID 401 is identical to the processor 101 which issued the disk processing requirement command, as shown in the step 1150, the requirement acceptance judging section 112 checks the access right to the virtual disk ID 401 to be processed designated by the disk processing requirement command 400 referring to access right information (refer to Table 1) of the structural definition

information, and the flow proceeds to the step 1160. The access right information represents a computer having access right.

Then, in the case of no access right in the step 5 1160, the flow proceeds to the branched step 1195, and in the case of yes access right, the flow proceeds to the branched step 1170.

In the case of no access right, the requirement is refused as shown in the step 1195, and the flow ends. In the 10 case of ending with a refusal of the requirement, the requirement control section 111 creates a disk requirement processing status 500 and returns it to the processor 101. The disk processing status 500 sets a status code to inform the results that the virtual disk ID 401 and password 402 are identical to the disk requirement processing command 400 and that the disk status has no access right.

In the case of access right, as shown in the step 1170, the requirement acceptance judging section 112 performs password checking by comparing the password 402 of the disk processing command 400 and the password 305 of the structural definition information stored in the structural definition information holding section 114, the flow proceeds to the step 20 1180. Then, in the step 1180, if the passwords are not identical, the flow proceeds to the branched step 1195, and if 25 the pass words are identical, the flow proceeds to the branched step 1190. In this example, the status notice is the same for refusals due to no access right and due to mismatch of passwords, but it is preferable to differentiate the status

notice to improve fault detection function.

If the passwords are identical, as shown in the step 1190, the non-remote requirement processing is executed and the flow ends. The disk requirement processing operation may be 5 carried out by software when the processor is provided in the disk requirement processing section 110. Non-remote requirement processing operation is described referring to Fig. 12.

A flow of the non-requirement processing operation is 10 described referring to Fig. 12. First, as shown in the step 1210, the requirement control section 111 prepares an actual disk processing requirement command 900 from the disk requirement command 400. The virtual disk ID 401 of the disk processing requirement command 400 is converted to a 15 corresponding actual disk ID 703 referring to the structural definition information (refer to Table 1), thereby, the actual disk processing requirement command 900 is prepared from the disk processing requirement command 400.

Then, as shown in the step 1220, the requirement 20 control section 111 issues the actual disk processing requirement command 900 to the disk control mechanism sharing control section 115.

As shown in the step 1230, the disk control mechanism sharing control section 115 serializes the actual disk 25 processing requirement command 900 issued from the remote requirement processing section 121 and requirement control section 111, and issues it to the disk control mechanism 104. The serializing processing of the actual disk processing

requirement command 900 is described in the description of Fig.

15.

As shown in the step 1240, the disk control mechanism 104 controls a disk from 106-1 to 106-N using the actual disk processing requirement command 900. Then, as shown in the step 1250, the disk control mechanism 104 returns an actual disk processing status 1000 to the disk control mechanism sharing control section 115 as a return value to the control to the disk from 106-1 to 106-N by the actual disk processing requirement command 900.

As shown in the step 1260, the disk control mechanism sharing control section 115 returns the actual disk processing status 1000 to the requirement control section 111. Then, as shown in step 1270, the requirement control section 111 retrieves the virtual disk ID 401 corresponding to the actual disk ID 703 of the actual disk processing status 1000 referring to the structural definition information (refer to Fig. 3A), thereby the requirement control section 111 creates a disk processing status 500.

As shown in step 1280, the requirement control section 111 returns the disk processing status 500 to the processor 101, and the non-remote requirement processing ends. The non-remote requirement processing operation may be performed by software alternatively when the processor is incorporated in the disk requirement processing section 110.

A flow of the remote requirement processing operation is described referring to Fig. 13. First, as shown in the step 1310, the remote requirement issue section 122 creates a remote

disk processing requirement command 700 from the disk
processing requirement command 400 and structural definition
information. Referring to the structural definition
information (refer to Table 1), the virtual disk ID 401 of the
5 disk processing requirement command 400 is converted to the
corresponding actual disk ID 703, thereby, the actual disk
processing requirement command 900 is created from the disk
processing requirement command 400. Then, as shown in the step
1320, the remote requirement issue section 122 requires
10 transmission of the remote disk processing requirement command
700 to the computer coupling adapter control section 123.

As shown in the step 1330, the computer coupling
mechanism adapter control section 123 transfers the remote disk
processing requirement command 700 to the remote requirement
processing section 121 of the actual disk control computer
15 (refer to Table 1) through the computer coupling mechanism
adapter 130. Then, as shown in the step 1340, the remote
requirement processing section 121 requests checking of access
right of the remote disk processing requirement command 700 to
the requirement acceptance judging section 112.
20

As shown in the step 1350, the requirement acceptance
judging section 112 receives the remote disk processing
requirement command 700, and checks the access right to the
actual disk control computer ID 702 and actual disk ID 703 to
25 be processed as designated by the remote disk processing
requirement command 700 by retrieving the access right
information (refer to Table 1) of the structural definition
information, and the flow proceeds to the step 1360. Then, as

shown in the step 1360, if there is no access right, the flow proceeds to the branched step 1395, and if there is access right, the flow proceeds to the branched step 1370.

When there is no access right, as shown in the step 5 1395, the requirement is refused, and the flow ends. When the requirement is refused and the flow ends, the remote requirement processing section 121 creates a remote disk processing status 800, and returns it to the remote requirement issue section 122 and sends an error notice to the processor 10 which issued the disk processing requirement command. Details of this processing are described in the description of Fig. 16.

When there is access right, as shown in the step 15 1370, the requirement acceptance judging section 112 compares the password of 402 of the remote disk processing requirement command 700 and the password 305 of the structural definition information stored in the structural definition information holding section 114 to check password, and the flow proceeds to the step 1380. Then, in the step 1380, if the passwords are not identical, the flow proceeds to the branched step 1395. On 20 the other hand, if the passwords are identical, the flow proceeds to the branched step 1390. In this example, the status notice is the same for refusals due to no access right and due to mismatch of pass words, but it is preferable to differentiate the status notice to improve fault detection 25 function.

If the passwords are identical, as shown in the step 1390, the remote requirement actual disk processing is executed and the flow ends. The remote requirement processing operation

may be performed by software alternatively when the processor is incorporated in the disk requirement processing section 110. The remote requirement actual disk processing is describe in reference to Fig. 14.

5 A flow of the remote requirement actual disk processing is described referring to Fig. 14. First, as shown in the step 1410, the remote requirement processing section 121 creates an actual disk processing requirement command 900 from the remote disk processing requirement command 700, and the flow proceeds to the step 1420. The actual disk ID 703 of the actual disk processing requirement command is identical with the actual disk ID 703 of the remote disk requirement command 700, and the disk control command/data 403 of the actual disk processing requirement command is identical with the disk control command/data 403 of the remote disk requirement command 700. Then, as shown in the step 1420, the remote requirement processing section 121 issues the actual disk processing requirement command 900 to the disk control mechanism sharing control section 115, and the flow proceeds to the step 1430.

10 As shown in the step 1430, the disk control mechanism sharing control section 115 serializes the actual disk processing command 900 issued from the remote requirement processing section 121 and the requirement control section 111, then issues it to the disk control mechanism 104, and the flow proceeds to the step 1440. The operation of the disk control mechanism sharing control section 115 is described in reference to Fig. 15. As shown in the step 1440, the disk control mechanism 104 controls a disk (from 106-1 to 106-N) using the

actual disk processing requirement command 900, and the flow proceeds to the step 1450.

As shown in the step 1450, the disk control mechanism 104 returns the actual disk processing status 1000 to the disk control mechanism sharing control section 115 as a return value of the control of the disk from 106-1 to 106-N by the actual disk processing requirement command 900, and the flow proceeds to the step 1460. Then, as shown in the step 1460, the disk control mechanism sharing section 115 returns the actual disk processing status 1000 to the remote requirement processing section 121, and the flow proceeds to the step 1470.

As shown in the step 1470, the remote requirement processing section 121 creates a remote disk processing status 800 from the actual disk processing status 1000 based on the structural definition information, and the flow proceeds to the step 1480. In the step 1480, the remote requirement processing section 121 requests the transmission of the remote disk processing status 800 to the computer coupling mechanism adapter 123, and the flow proceeds to the step 1490.

In the step 1490, the computer coupling mechanism adapter 123 transfers the remote disk processing status 800 to the remote requirement issue section 122 of the requirer computer through the computer coupling mechanism adapter 130, and the flow proceeds to the step 1492. Then, as shown in the step 1492, the remote requirement issue section 122 retrieves the virtual disk ID 401 corresponding to the actual disk control computer ID 702 and actual disk ID 703 of the remote disk processing status 800 referring to the structural

definition information (refer to Table 1) and creates a disk processing status 500. The flow then proceeds to the step 1495. In the step 1495, the remote requirement issue section 122 returns the disk processing status 500 to the processor 5 101, and the flow ends. The remote requirement actual disk processing operation may be performed by software alternatively when the processor is incorporated in the disk requirement processing section 110.

Fig. 15 shows an embodiment of disk control mechanism 10 sharing control section 115. The disk control mechanism sharing control section 115 comprises a remote requirement processing section-corresponding-requirement holding section 1510, requirement control section-corresponding-requirement holding section 1520, disk requirement serializing section 1530, and actual disk control section 1540.

15 The remote requirement processing section-corresponding-requirement holding section 1510 holds the actual disk requirement command 900 and actual disk processing status 1000 issued from the remote requirement processing section 121. The remote requirement processing section-corresponding-segment holding section 1510, for example, comprises logic such as TTL and CMOS.

20 The requirement control section-corresponding-requirement holding section 1520 holds the actual disk requirement command 900 and actual disk processing status 1000 issued from the requirement control section 111. The requirement control section-corresponding-requirement holding section 1520, for example, comprises a

logic such as TTL and CMOS.

The disk requirement serializing section 1530 serializes the actual disk requirement command 900 issued from the remote requirement processing section 121 and the requirement control section 111, and provides it to the actual disk control section 1540. The disk requirement serializing section 1530, for example, comprises logic such as TTL and CMOS. Examples of the serialization of each requirement include round-robin scheduling in which requirements in the remote requirement processing section-corresponding-requirement holding section 1510 and a requirement in the requirement control section-corresponding-requirement holding section 1520 are fetched alternately.

The disk control section 1540 is a section for issuing the actual disk requirement command 900 and receiving the actual disk processing status 1000. Actual disk requirement commands 900 are issued to the disk control mechanism 104 according to the order issued from the disk requirement serializing section 1530. Actual disk processing statuses 1000 are received according to the order issued from the disk control mechanism 104. The received actual disk processing status 1000 is transferred to the remote requirement processing section-corresponding-requirement holding section 1510 and requirement control section-corresponding-requirement holding section 1520 through the disk requirement serializing section 1530.

The actual disk processing status 1000 is returned from the remote requirement processing

section-corresponding-requirement holding position 1510 to the remote requirement processing section 121. The actual disk processing status 1000 is returned from the requirement control section-corresponding-requirement holding section 1520 to the requirement control section 111. The disk control mechanism sharing control section may be replaced by software alternatively when the processor is incorporated in the disk requirement processing section 110.

A flow of the remote requirement refuse processing is illustrated in Fig. 16. First, as shown in the step 1610, the remote requirement processing section 121 creates a remote disk processing status 800 from the status to the access right error and password error and remote disk processing requirement command 700, and the flow proceeds to the step 1620. The remote disk processing requirement command 700 and the remote disk processing status 800 are identical except for the disk control command/data 403 and disk status/data 503.

As shown in step 1620, the remote requirement processing section 121 requests the computer coupling mechanism adapter control section 123 to transmit the remote disk processing status 800, and the flow proceeds to the step 1630. Then, as shown in step 1630, the computer coupling mechanism adapter 123 transfers the remote disk processing status 800 to the remote requirement issue section 122 of the requirer computer, and the flow proceeds to the step 1640.

In step 1640, the remote requirement issue section 122 creates a disk processing status 500 from the remote disk processing status 800 by retrieving the virtual disk ID 401

corresponding to the actual disk control computer ID 702 and
actual disk ID 703 of the remote disk processing status 800 and
referring to the structural definition information (refer to
Table 1. The flow then proceeds to the step 1650.

5 In step 1650, the remote requirement issue section
122 returns the disk processing status 500 to the processor
101, and the flow ends. The remote requirement refusing
operation may be performed by software alternatively when the
processor is incorporated in the disk requirement processing
10 section 110.

15 As described hereinbefore, according to the present
invention, processing requirement between the bus to which hard
disks to be shared and the attachment for remote access are
transferred as required, thereby, an access to the attachment
is operated only when it is necessary, and the processor in
which a requirement arises controls directly the hard disk.
Thus, a loosely-coupled computer system having high performance
shared disks can be structured.

20 While the present invention has been described in
detail and pictorially in the accompanying drawings it is not
limited to such details since many changes and modifications
recognizable to those of ordinary skill in the art may be made
to the invention without departing from the spirit and the
scope thereof.

WE CLAIM:

1. A computer system comprising:

a plurality of computers connected to each other,
wherein each computer includes a controller,
responsive to a processing requirement from another computer,
for controlling access to a shared memory device connected to
said computer based on structural definition information which
describes a structure of said computer system.

2. A computer system according to claim 1, wherein said
computer system is a loosely-coupled computer system.

3. A computer system according to claim 1, wherein said
computers are connected to each other by a coupling mechanism.

4. A computer system according to claim 3, wherein said
coupling mechanism is a bus.

5. A computer system according to claim 3, wherein said
coupling mechanism includes at least a switch.

6. A computer system according to claim 3, wherein said
coupling mechanism is an asynchronous transfer mode switching
system.

7. A computer system according to claim 1, wherein said
controller comprises:

a requirement acceptance judging section for checking

whether access to said shared memory device from said another computer is permitted based on said structural definition information and performing control of said access if said access is permitted.

8. A computer system according to claim 7, wherein said structural definition information includes information indicating a corresponding relation between virtual identifiers and said shared memory devices and information indicating for each virtual identifier which of said computers is permitted to access the shared memory device corresponding to said virtual identifiers, and

wherein said control of said access is performed using said virtual identifiers.

9. A computer system according to claim 1, wherein said controller comprises:

a remote processing requirement section for issuing a remote processing requirement to said another computer to access said shared memory device connected to said another computer.

10. A computer system according to claim 7, wherein said controller comprises:

a remote processing requirement a section for issuing a remote processing requirement to said another computer to access said shared memory device connected to said another computer.

11. A computer system according to claim 8, wherein said controller comprises:

a remote processing requirement section for issuing a remote processing requirement to said another computer to access said shared memory device connected to said another computer.

12. A computer system according to claim 1, wherein said controller comprises:

a remote processing requirement section for issuing a remote processing requirement to said another computer to access said shared memory device connected to said another computer; and

a remote processing requirement processing section for processing said remote processing requirement when access to said shared memory device is permitted.

13. A computer system according to claim 7, wherein said controller comprises:

a remote processing requirement section for issuing a remote processing requirement to said another computer to access said shared memory device connected to said another computer;

wherein said requirement acceptance judging section, responsive to a remote processing requirement from another computer, checks said structural definition information to determine whether access to said shared memory device is permitted; and

a remote processing requirement processing section for processing said remote processing requirement from said another computer when access to said shared memory device is permitted.

14. A computer system according to claim 8, wherein said controller comprises:

a remote processing requirement section for issuing a remote processing requirement to said another computer to access said shared memory device connected to said another computer;

wherein said requirement acceptance judging section, responsive to a remote processing requirement from another computer, checks said structural definition information to determine whether access to said shared memory device is permitted; and

a remote processing requirement processing section for processing said remote processing requirement from said another computer when access to said shared memory device is permitted.

15. A computer system according to claim 1, wherein said computer system is changed to a different structure by changing said structural definition information.

16. A computer system according to claim 7, wherein said computer system is changed to a different structure by changing said structural definition information.

17. A computer system according to claim 8, wherein said computer system is changed to a different structure by changing said structural definition information.

18. A computer system according to claim 9, wherein said computer system is changed to a different structure by changing said structural definition information.

19. A computer system according to claim 10, wherein said computer system is changed to a different structure by changing said structural definition information.

20. A computer system according to claim 11, wherein said computer system is changed to a different structure by changing said structural definition information.

21. A computer system according to claim 12, wherein said computer system is changed to a different structure by changing said structural definition information.

22. A computer system according to claim 13, wherein said computer system is changed to a different structure by changing said structural definition information.

23. A computer system according to claim 14, wherein said computer system is changed to a different structure by changing said structural definition information.

24. A computer system according to claim 8, wherein correspondence between said virtual identifiers and said shared memory devices can be changed by changing said structural definition information.

25. A computer system according to claim 11, wherein correspondence between said virtual identifiers and said shared memory devices can be changed by changing said structural definition information.

26. A computer system according to claim 14, wherein correspondence between said virtual identifiers and said shared memory devices can be changed by changing said structural definition information.

27. A computer system according to claim 17, wherein correspondence between said virtual identifiers and said shared memory devices can be changed by changing said structural definition information.

28. A computer system according to claim 20, wherein correspondence between said virtual identifiers and said shared memory devices can be changed by changing said structural definition information.

29. A computer system according to claim 23, wherein correspondence between said virtual identifiers and said shared

memory devices can be changed by changing said structural definition information.

30. In a computer system having a plurality of computers connected to each other, wherein each computer is connected to a shared disk through a disk controller which controls access to said shared disk, said disk controller comprising:

a memory for storing structural definition information which describes a structure of said computer system; and

a controller, responsive to a processing requirement, from another computer for controlling access to said shared disk memory device connected to said computer based on said structural definition information.

31. A disk controller according to claim 30, wherein said computer system is a loosely-coupled computer system.

32. A disk controller according to claim 30, wherein said computers are connected to each other by a coupling mechanism.

33. A disk controller according to claim 32, wherein said coupling mechanism is a bus.

34. A disk controller according to claim 32, wherein said coupling mechanism includes at least a switch.

35. A disk controller according to claim 32, wherein said

coupling mechanism is an asynchronous transfer mode switching system.

36. A disk controller according to claim 30, wherein said controller comprises:

a requirement acceptance judging section for checking whether access to said shared disk from said another computer is permitted based on said structural definition information and performing control of said access if said access is permitted.

37. A disk controller according to claim 36, wherein said structural definition information includes information indicating a corresponding relation between virtual identifiers and said shared disks and information indicating for each virtual identifier which of said computers is permitted to access the shared disk corresponding to said virtual identifiers, and

wherein said control of said access is performed using said virtual identifiers.

38. A disk controller according to claim 30, wherein said controller comprises:

a remote processing requirement section for issuing a remote processing requirement to said another computer to access said shared disk connected to said another computer.

39. A disk controller according to claim 36, wherein said

controller comprises:

a remote processing requirement a section for issuing a remote processing requirement to said another computer to access said shared disk connected to said another computer.

40. A disk controller according to claim 37, wherein said controller comprises:

a remote processing requirement section for issuing a remote processing requirement to said another computer to access said shared disk connected to said another computer.

41. A disk controller according to claim 30, wherein said controller comprises:

a remote processing requirement section for issuing a remote processing requirement to said another computer to access said shared disk connected to said another computer; and

a remote processing requirement processing section for processing said remote processing requirement when access to said shared disk is permitted.

42. A disk controller according to claim 36 wherein said controller comprises:

a remote processing requirement section for issuing a remote processing requirement to said another computer to access said shared disk connected to said another computer;

wherein said requirement acceptance judging section, responsive to a remote processing requirement from another computer, checks said structural definition information to

determine whether access to said shared disk is permitted; and
a remote processing requirement processing section
for processing said remote processing requirement from said
another computer when access to said shared disk is permitted.

43. A disk controller according to claim 36, wherein said
controller comprises:

a remote processing requirement section for issuing a
remote processing requirement to said another computer to
access said shared disk connected to said another computer;

wherein said requirement acceptance judging section,
responsive to a remote processing requirement from another
computer, checks said structural definition information to
determine whether access to said shared disk is permitted; and

a remote processing requirement processing section
for processing said remote processing requirement from said
another computer when access to said shared disk is permitted.

44. A disk controller according to claim 30, wherein said
computer system is changed to a different structure by changing
said structural definition information.

45. A disk controller according to claim 36, wherein said
computer system is changed to a different structure by changing
said structural definition information.

46. A disk controller according to claim 37, wherein said
computer system is changed to a different structure by changing

said structural definition information.

47. A disk controller according to claim 38, wherein said computer system is changed to a different structure by changing said structural definition information.

48. A disk controller according to claim 39, wherein said computer system is changed to a different structure by changing said structural definition information.

49. A disk controller according to claim 40, wherein said computer system is changed to a different structure by changing said structural definition information.

50. A disk controller according to claim 41, wherein said computer system is changed to a different structure by changing said structural definition information.

51. A disk controller according to claim 42, wherein said computer system is changed to a different structure by changing said structural definition information.

52. A disk controller according to claim 43, wherein said computer system is changed to a different structure by changing said structural definition information.

53. A disk controller according to claim 37, wherein correspondence between said virtual identifiers and said shared

disks can be changed by changing said structural definition information.

54. A disk controller according to claim 40, wherein correspondence between said virtual identifiers and said shared disks can be changed by changing said structural definition information.

55. A disk controller according to claim 43, wherein correspondence between said virtual identifiers and said shared disks can be changed by changing said structural definition information.

56. A disk controller according to claim 46, wherein correspondence between said virtual identifiers and said shared disks can be changed by changing said structural definition information.

57. A disk controller according to claim 49, wherein correspondence between said virtual identifiers and said shared disks can be changed by changing said structural definition information.

58. A disk controller according to claim 52, wherein correspondence between said virtual identifiers and said shared disks can be changed by changing said structural definition information.

59. In a computer system having a plurality of computers connected to each other, wherein each computer is connected to a shared disk and is directed by a computer program for controlling access to said shared disk, said computer program comprising:

a first code for causing said computer to store structural definition information in a memory, said structural definition information describes a structure of said computer system; and

a second code for causing said computer, responsive to a processing requirement from another computer, to control access to said shared disk connected to said computer based on said structural definition information.

60. A computer program according to claim 59, wherein said computer system is a loosely-coupled computer system.

61. A computer program according to claim 59, wherein said computers are connected to each other by a coupling mechanism.

62. A computer program according to claim 61, wherein said coupling mechanism is a bus.

63. A computer program according to claim 61, wherein said coupling mechanism includes at least a switch.

64. A computer program according to claim 61, wherein

said coupling mechanism is an asynchronous transfer mode switching system.

65. A computer program according to claim 59, wherein said second code comprises:

a requirement acceptance judging code for causing said computers to check whether access to said shared disk from said another computer is permitted based on said structural definition information and perform control of said access if said access is permitted.

66. A computer program according to claim 65, wherein said structural definition information includes information indicating a corresponding relation between virtual identifiers and said shared disks and information indicating for each virtual identifier which of said computers is permitted to access the shared disk corresponding to said virtual identifiers, and

wherein said control of said access is performed using said virtual identifiers.

67. A computer program according to claim 59, wherein said second code comprises:

a remote processing requirement code for causing said computer to issue a remote processing requirement to said another computer to access said shared disk connected to said another computer.

68. A computer program according to claim 65, wherein
said second code comprises:

a remote processing requirement a code for causing
said computer to issue a remote processing requirement to said
another computer to access said shared disk connected to said
another computer.

69. A computer program according to claim 66, wherein
said second code comprises:

a remote processing requirement code for causing said
computer to issue a remote processing requirement to said
another computer to access said shared disk connected to said
another computer.

70. A computer program according to claim 59, wherein
said second code comprises:

a remote processing requirement processing code for
causing said computer to process said remote processing
requirement when access to said shared disk is permitted.

71. A computer program according to claim 65, wherein
said second code comprises:

a remote processing requirement code for causing said
computer to issue a remote processing requirement to said
another computer to access said shared disk connected to said
another computer;

wherein said requirement acceptance judging code,
responsive to a remote processing requirement from another

computer, checks said structural definition information to determine whether access to said shared disk is permitted; and a remote processing requirement processing code for causing said computer to process said remote processing requirement from said another computer when access to said shared disk is permitted.

72. A computer program according to claim 66, wherein said second code comprises:

a remote processing requirement code for causing said computer to issue a remote processing requirement to said another computer to access said shared disk connected to said another computer;

wherein said requirement acceptance judging code, responsive to a remote processing requirement from another computer, checks said structural definition information to determine whether access to said shared disk is permitted; and

a remote processing requirement processing code for causing said computer to process said remote processing requirement from said another computer when access to said shared disk is permitted.

73. A computer program according to claim 59, wherein said computer system is changed to a different structure by changing said structural definition information.

74. A computer program according to claim 65, wherein said computer system is changed to a different structure by

changing said structural definition information.

75. A computer program according to claim 66, wherein said computer system is changed to a different structure by changing said structural definition information.

76. A computer program according to claim 67, wherein said computer system is changed to a different structure by changing said structural definition information.

77. A computer program according to claim 68, wherein said computer system is changed to a different structure by changing said structural definition information.

78. A computer program according to claim 69, wherein said computer system is changed to a different structure by changing said structural definition information.

79. A computer program according to claim 70, wherein said computer system is changed to a different structure by changing said structural definition information.

80. A computer program according to claim 71, wherein said computer system is changed to a different structure by changing said structural definition information.

81. A computer program according to claim 72, wherein said computer system is changed to a different structure by

changing said structural definition information.

82. A computer program according to claim 66, wherein correspondence between said virtual identifiers and said shared disks can be changed by changing said structural definition information.

83. A computer program according to claim 69, wherein correspondence between said virtual identifiers and said shared disks can be changed by changing said structural definition information.

84. A computer program according to claim 72, wherein correspondence between said virtual identifiers and said shared disks can be changed by changing said structural definition information.

85. A computer program according to claim 75, wherein correspondence between said virtual identifiers and said shared disks can be changed by changing said structural definition information.

86. A computer program according to claim 78, wherein correspondence between said virtual identifiers and said shared disks can be changed by changing said structural definition information.


87. A computer program according to claim 71, wherein


correspondence between said virtual identifiers and said shared disks can be changed by changing said structural definition information.

ABSTRACT

A computer system having a plurality of computers connected to each other by a computer coupling mechanism. Each computer includes a processor, memory, I/O device, disk control mechanism, computer coupling network adapter, disk requirement processing section connected to a system bus, and a disk connected to a disk control mechanism. The disk requirement processing section controls the disk, in response to a processing requirement for the disk from one of the processors of the other computers, based on structural definition information. The structural definition information describes a structure of the computer system. The computer system may be a loosely-coupled computer system.

FIG. 1

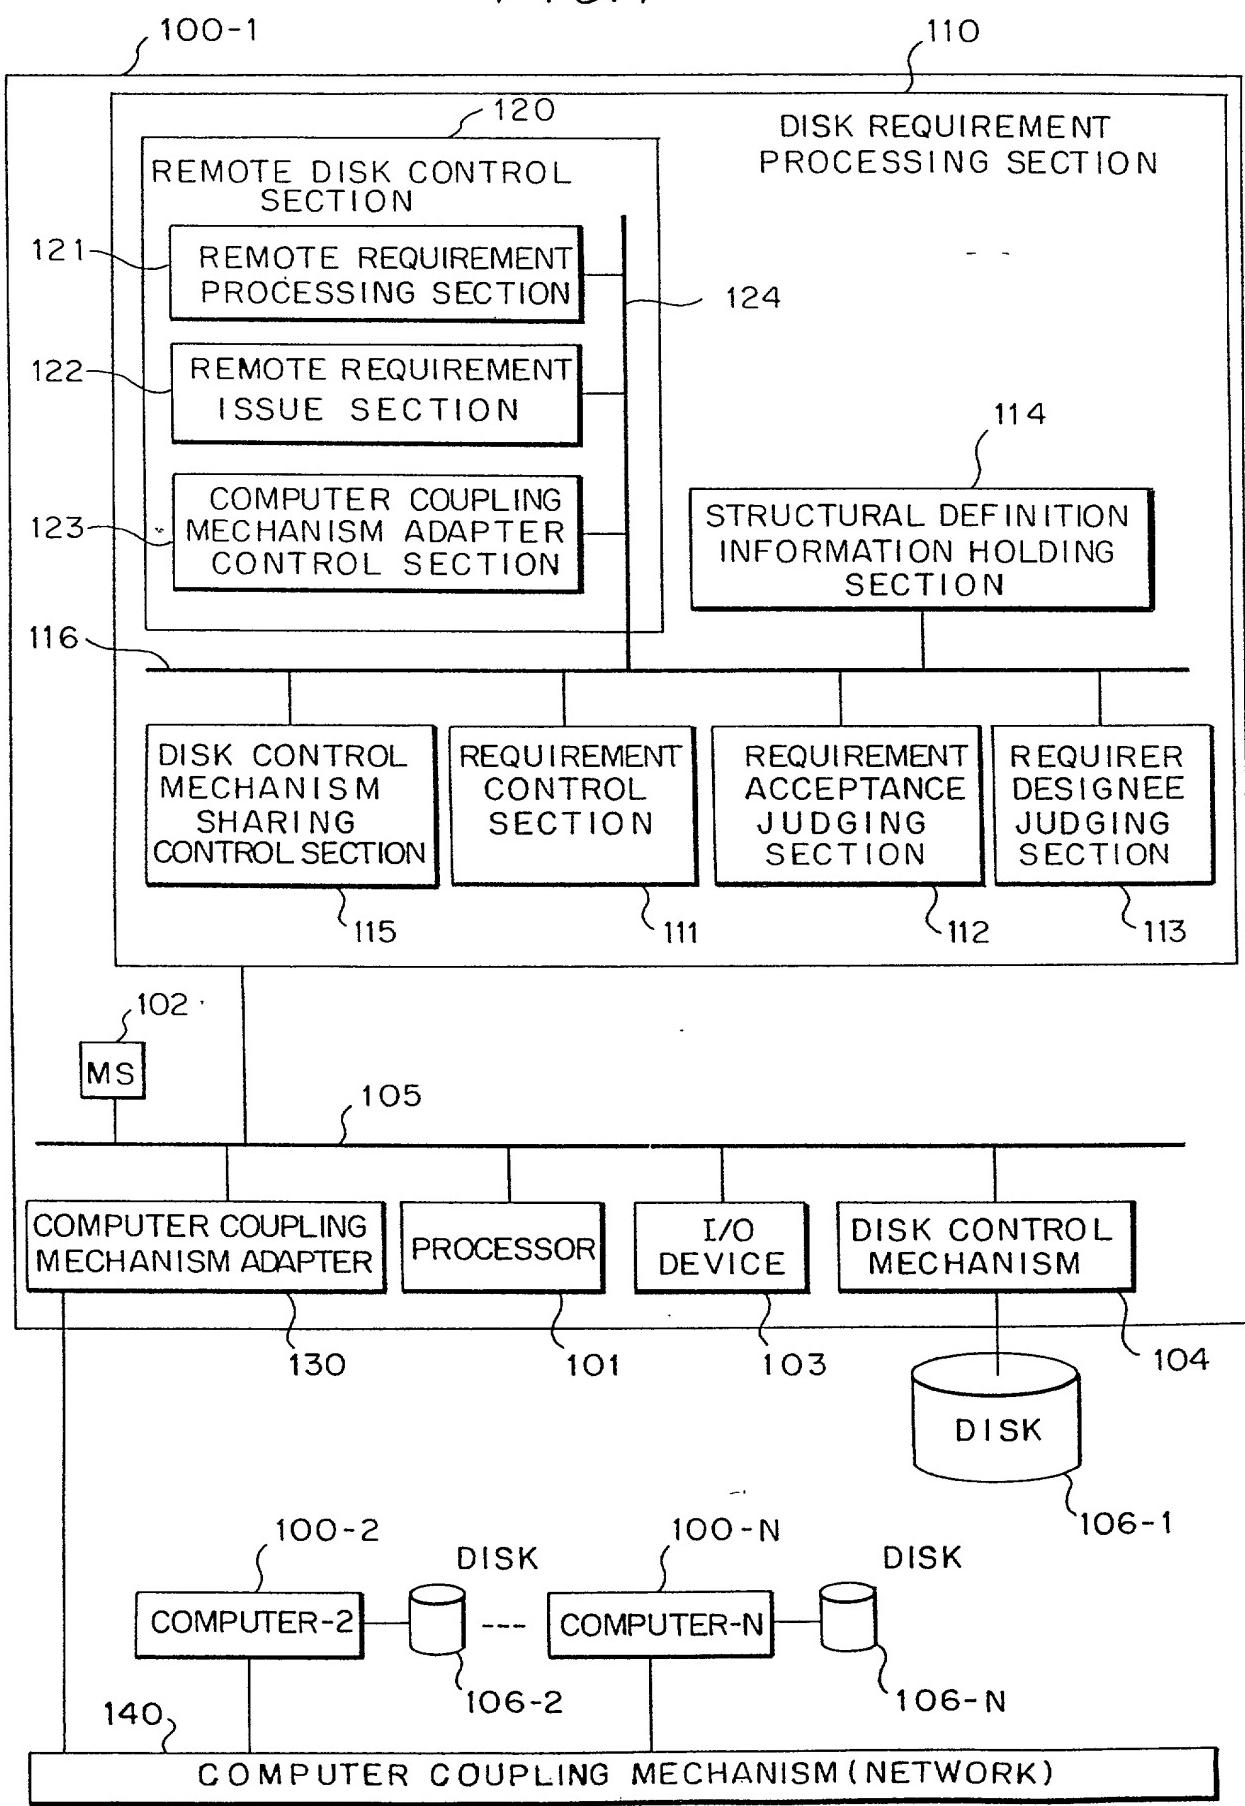

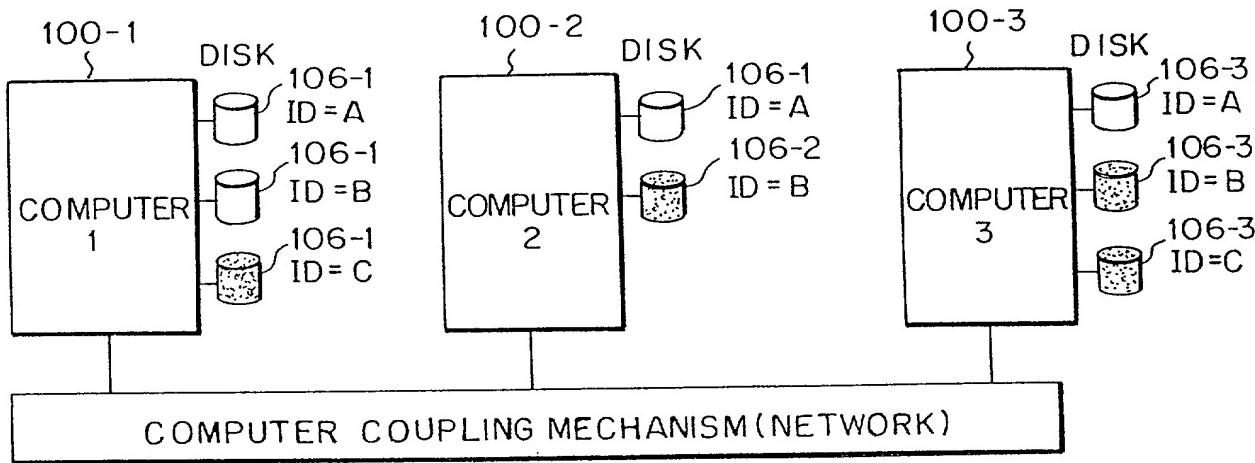

140

FIG. 2

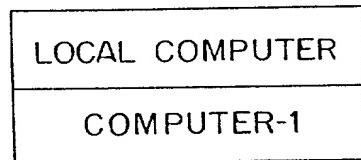


FIG. 3

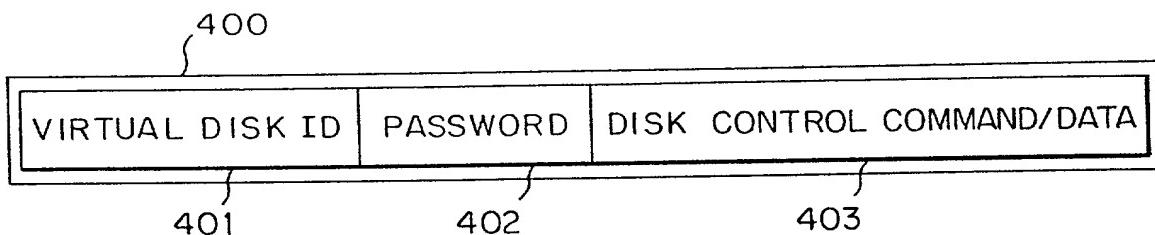


FIG. 4



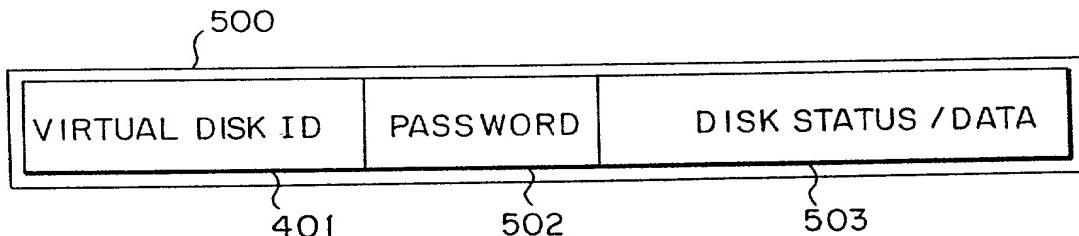


FIG. 5

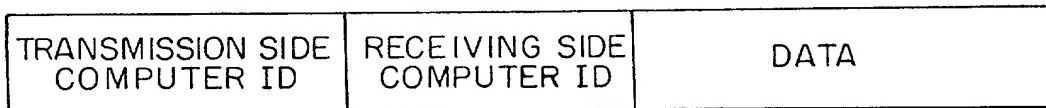


601 602 603

FIG. 6

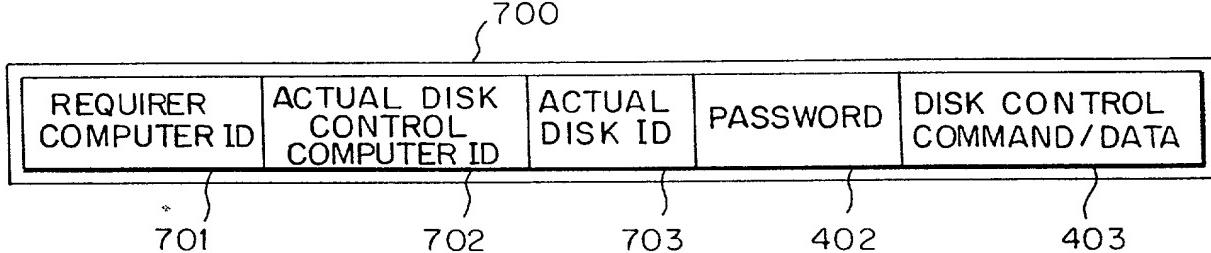

701 702 703 402 403

FIG. 7

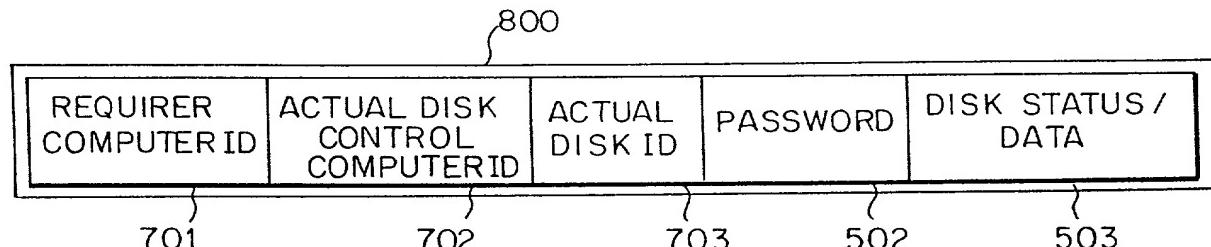


701 702 703 502 503

FIG. 8



703 403

FIG. 9

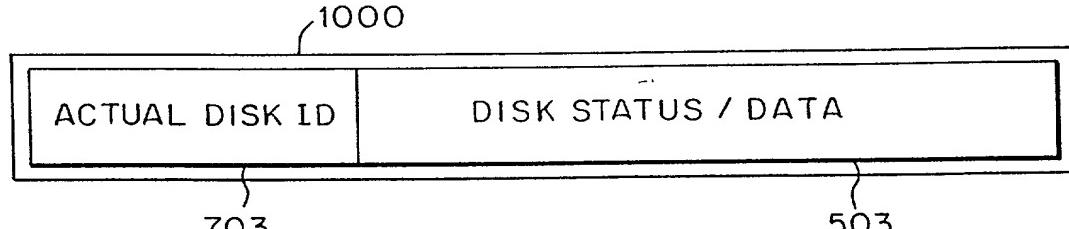

703 503

FIG. 10

FIG.11

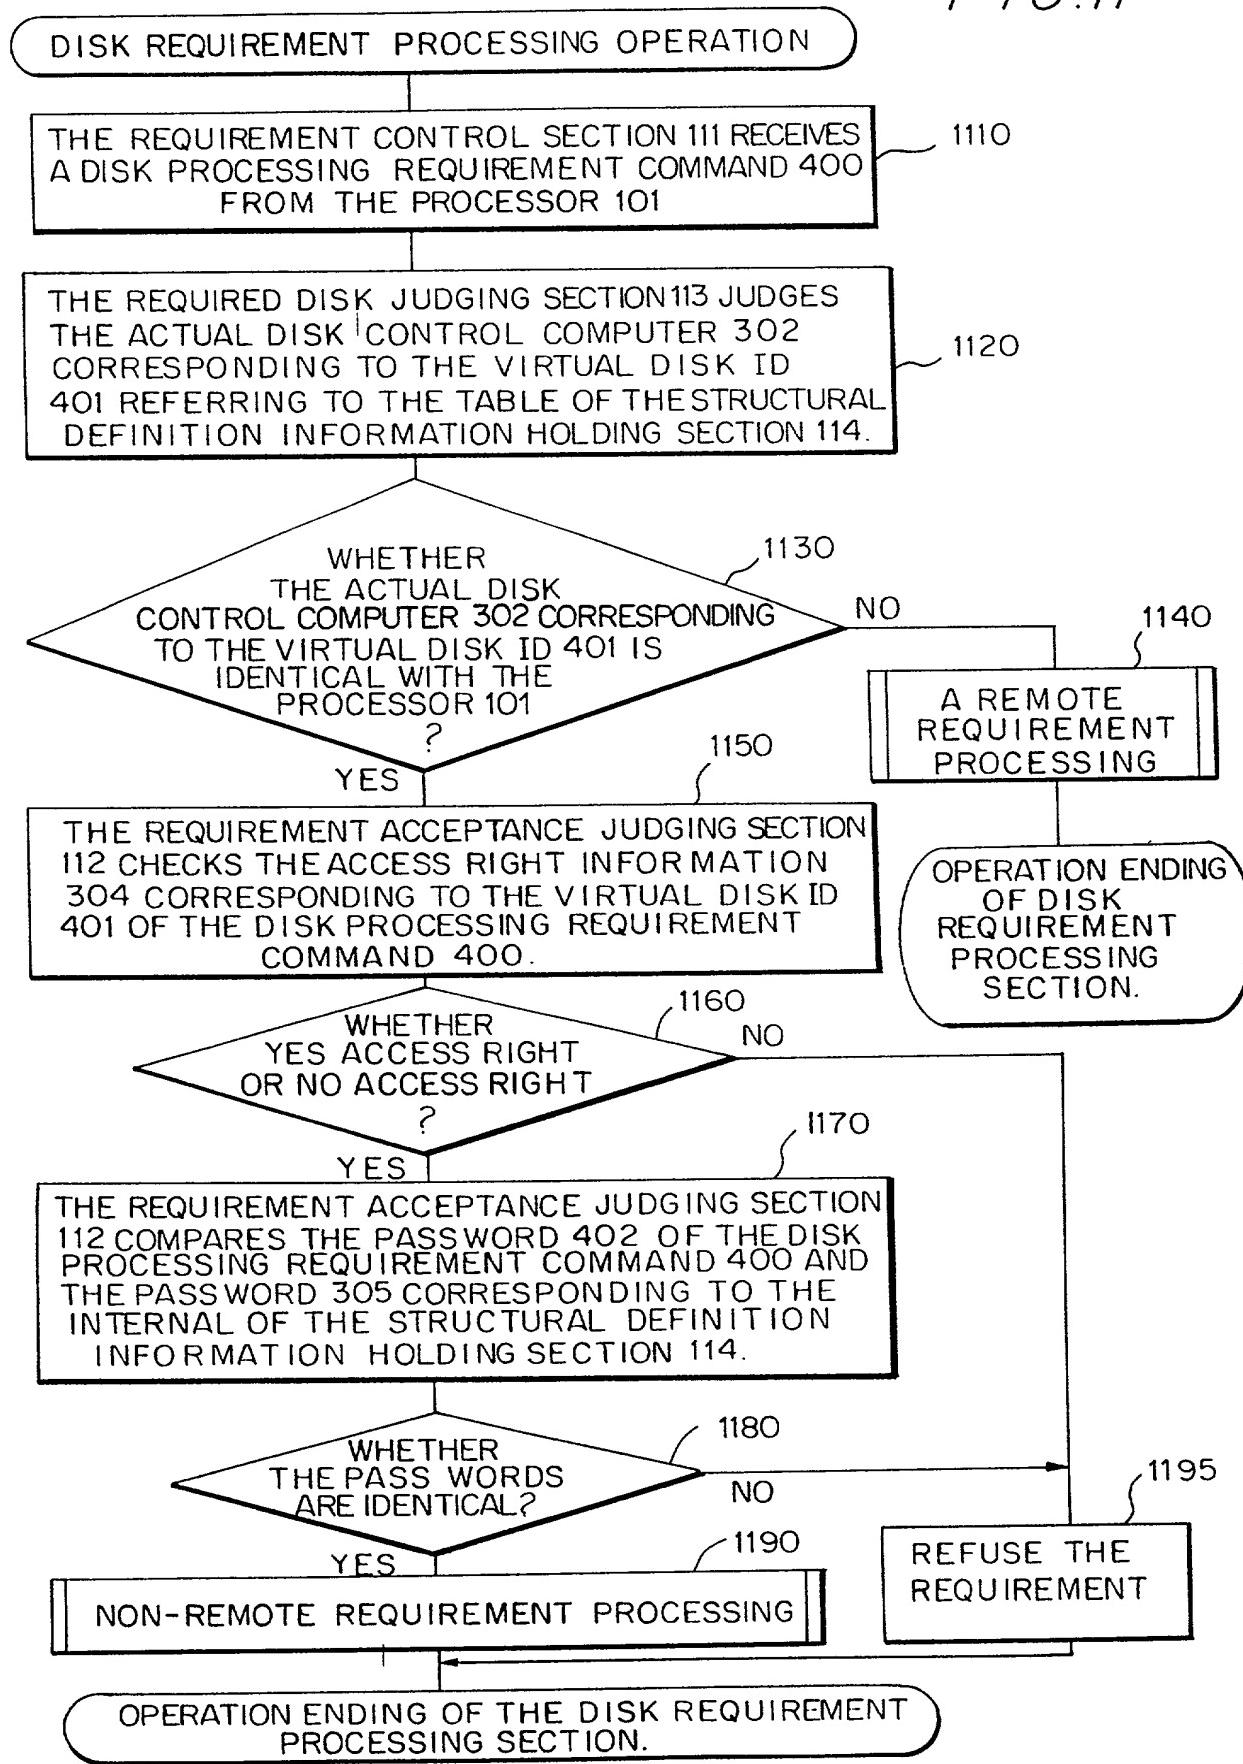


FIG. 12

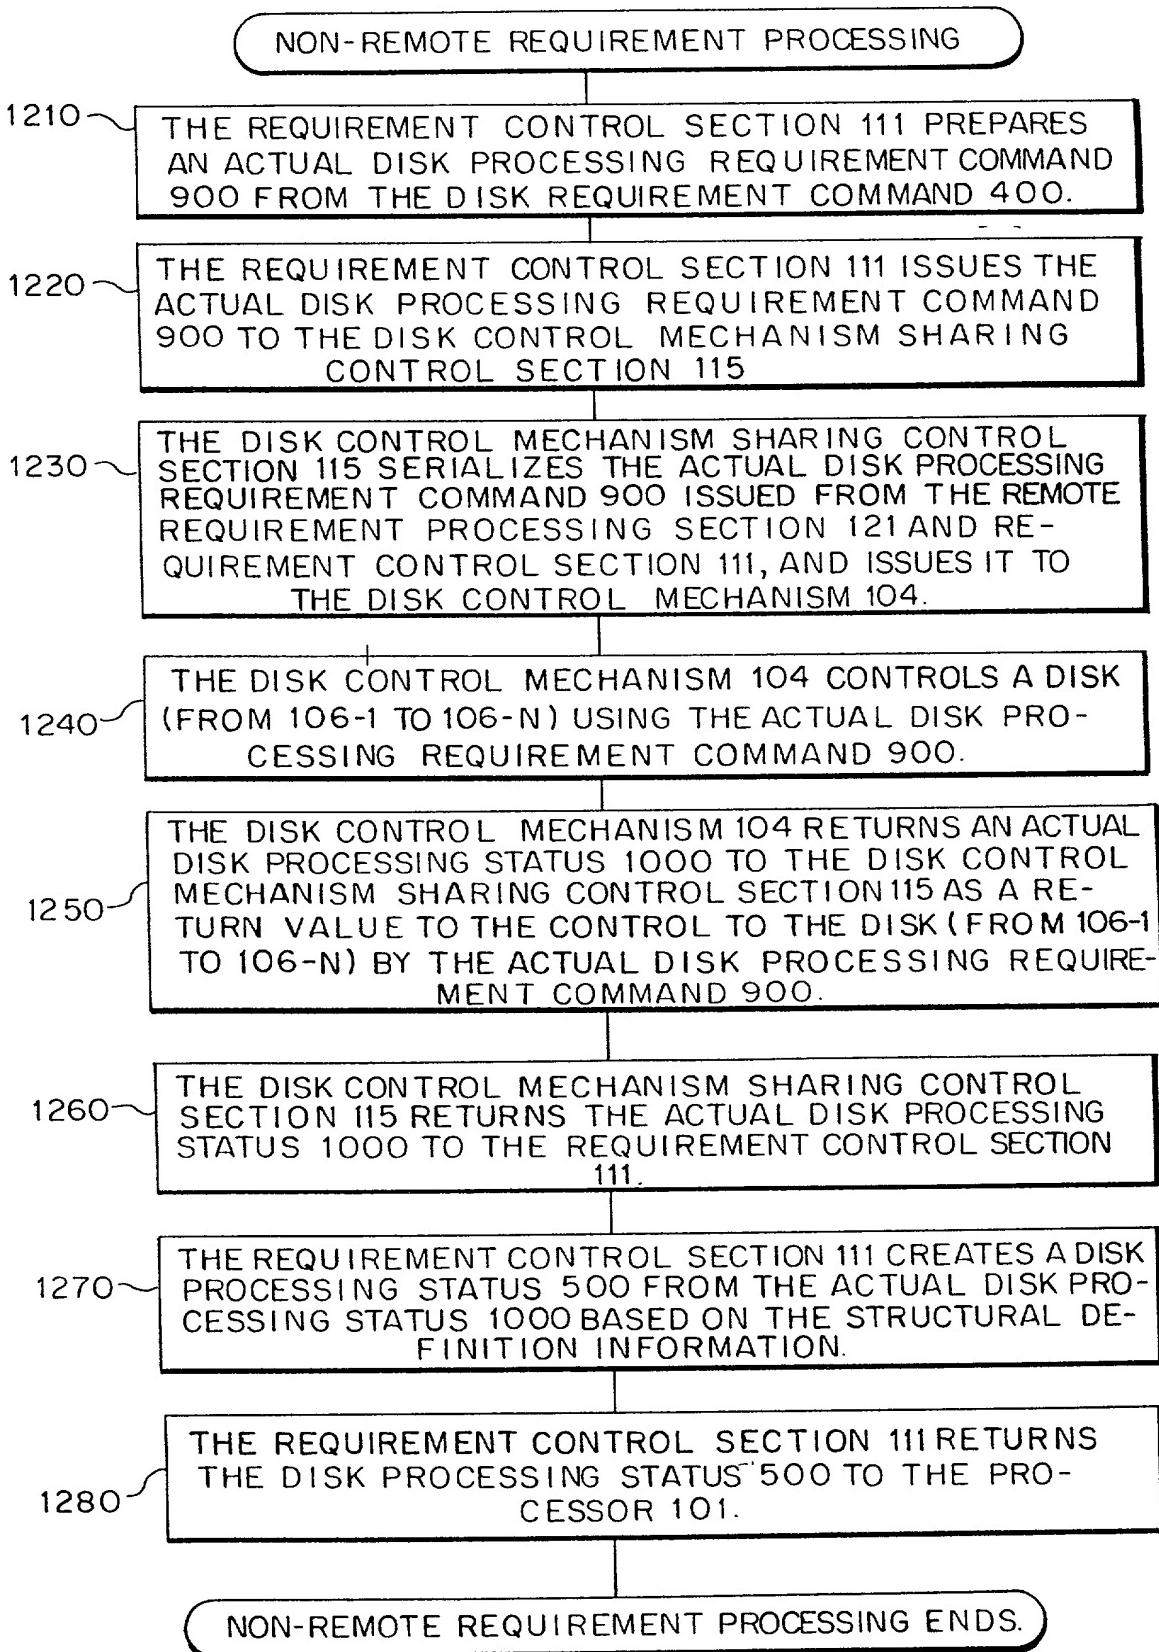


FIG.13

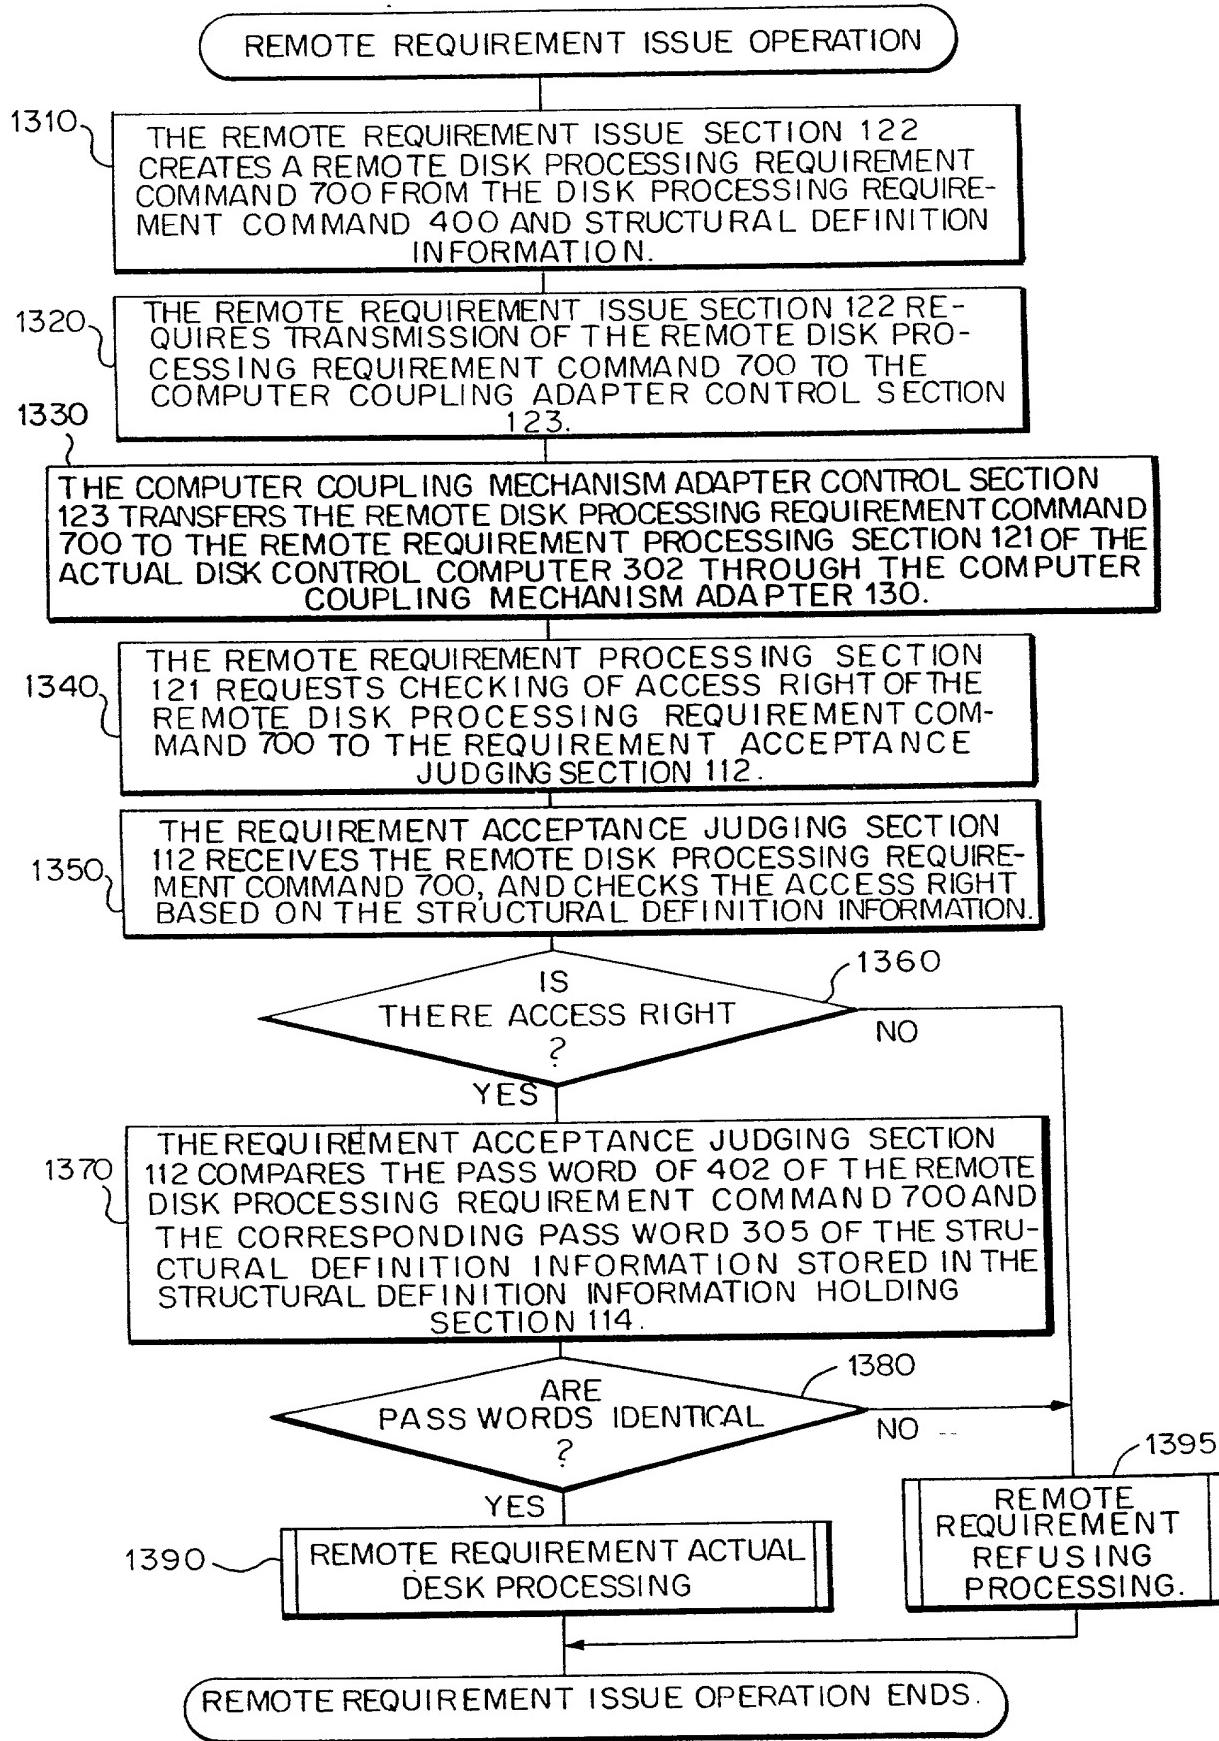


FIG. 14a

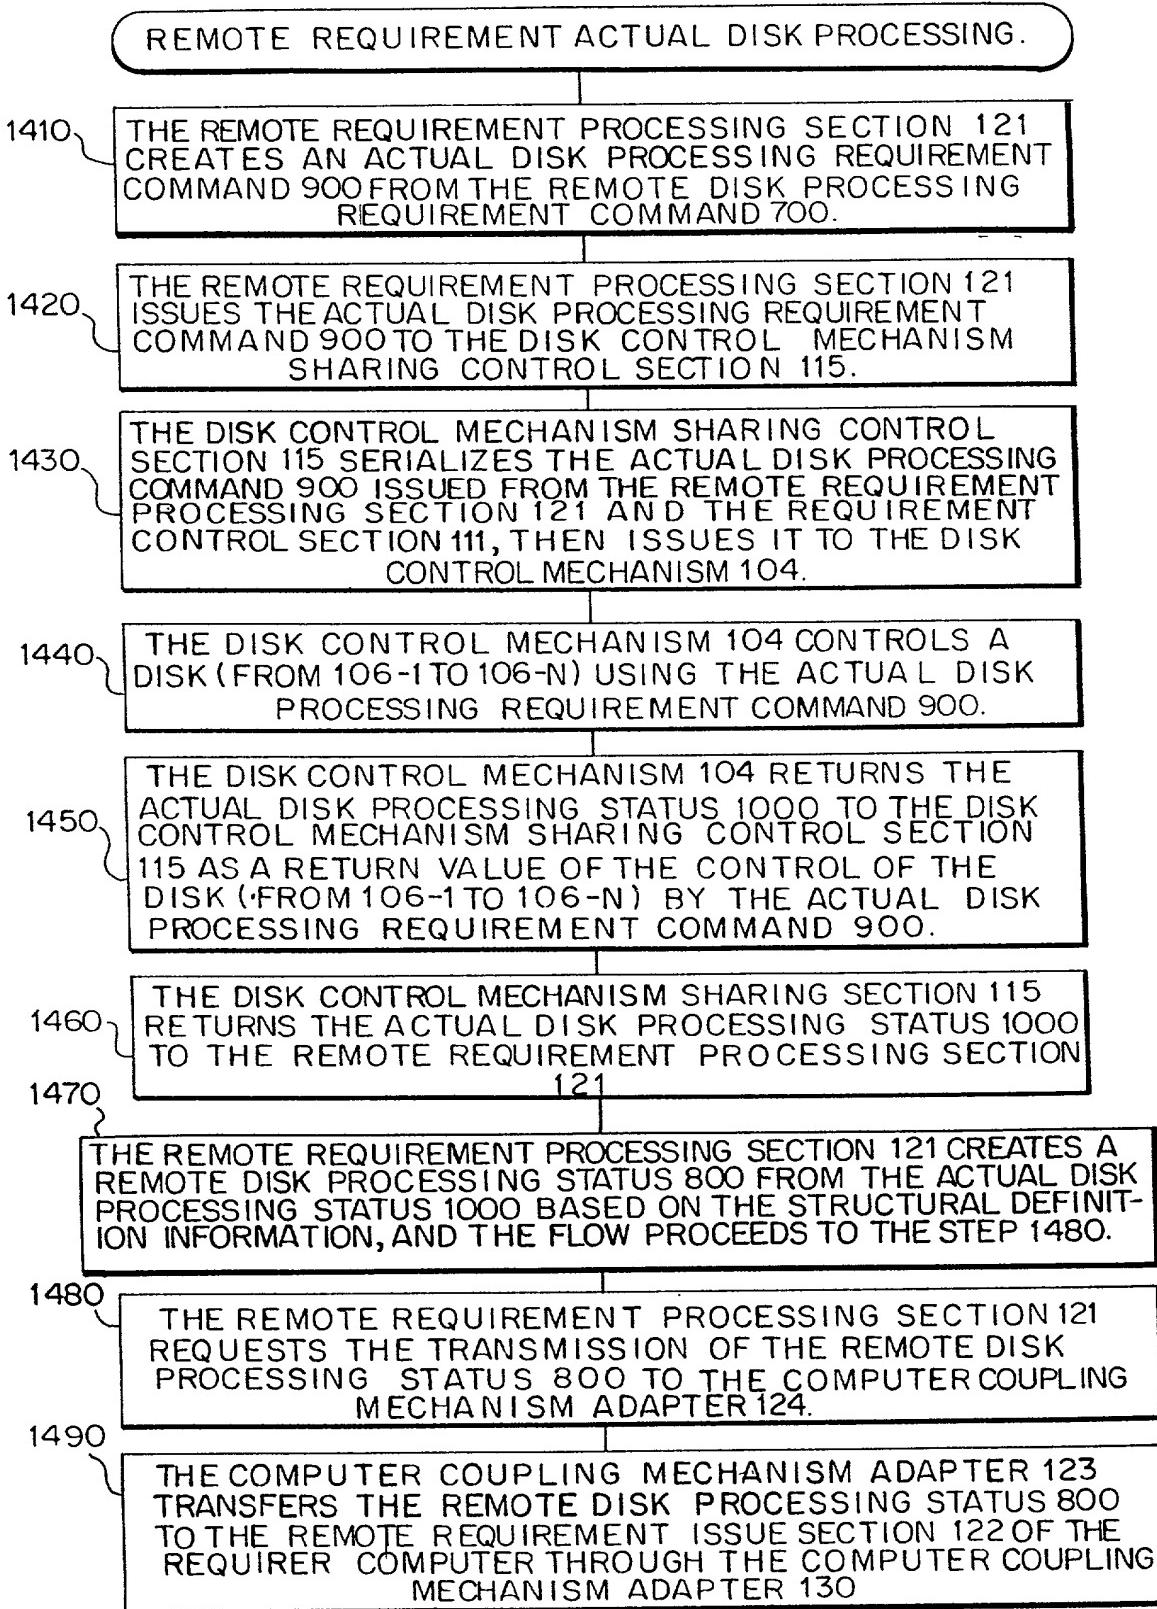


FIG.14b

FIG. 14a

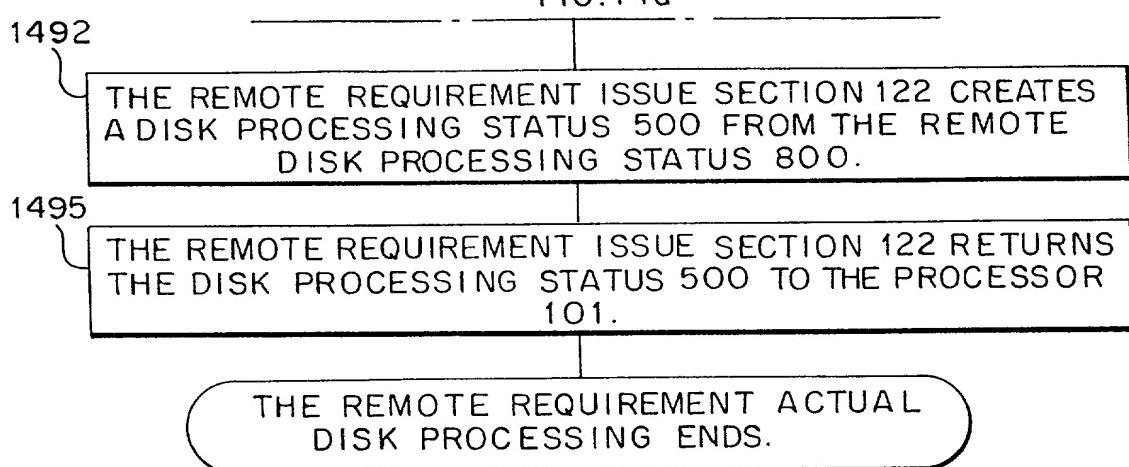


FIG. 14b

FIG. 15


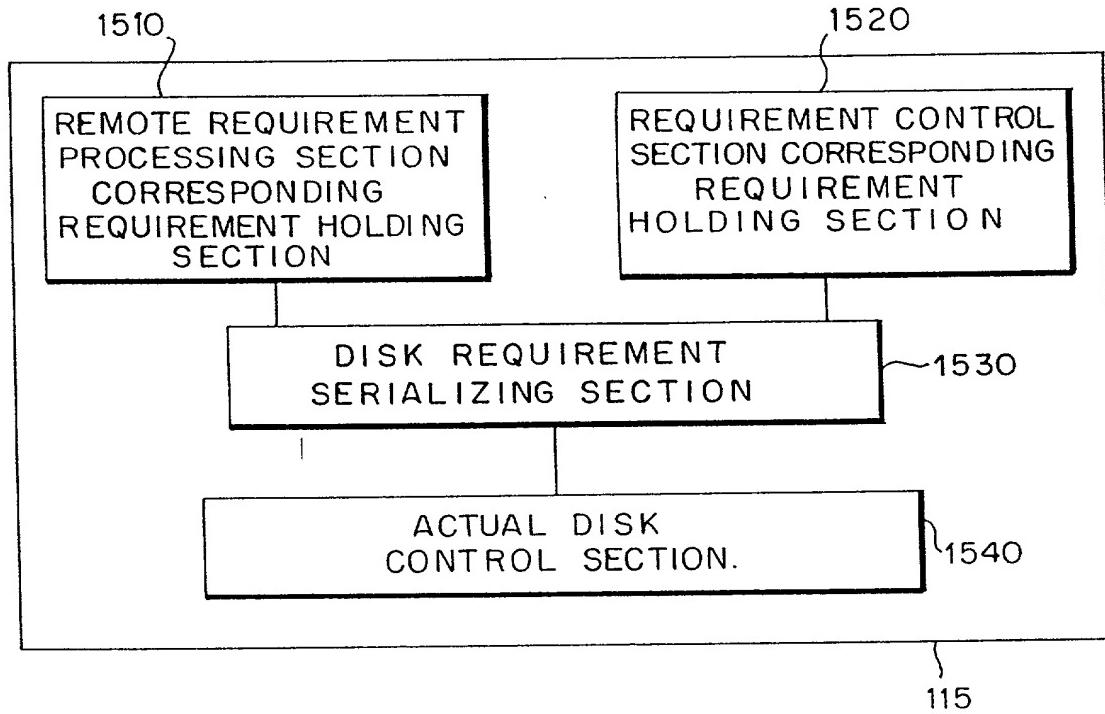


FIG. 16

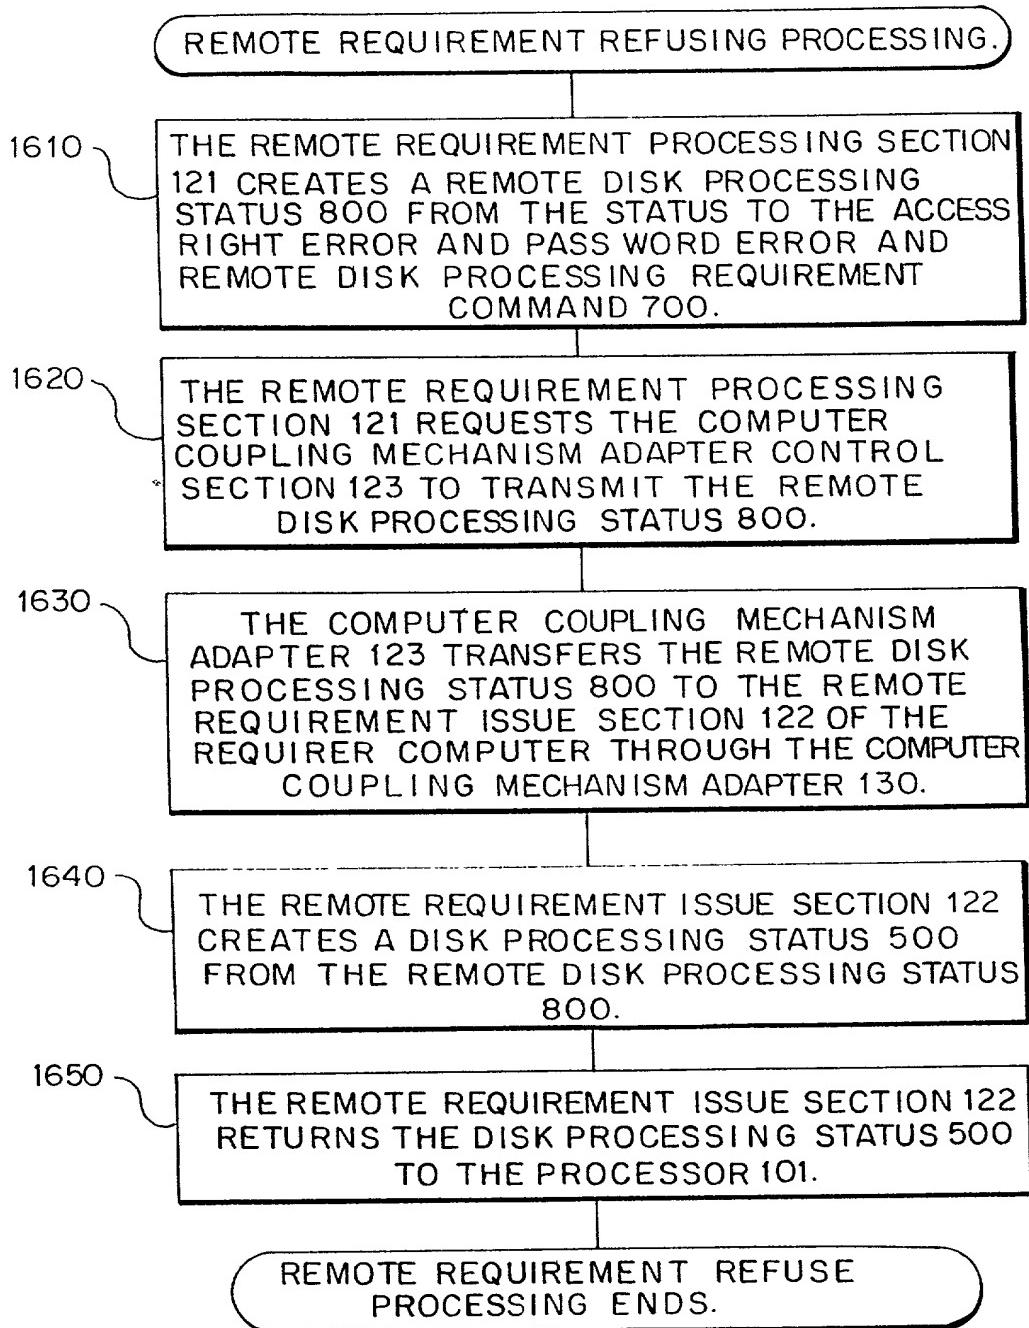

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A COMPUTER SYSTEM HAVING A PLURALITY OF COMPUTERS

EACH CONTROLLING ACCESS TO SHARED MEMORY BASED ON
STRUCTURAL DEFINITION INFORMATION

the specification of which (check one) is attached hereto.

was filed on June 21, 1996
as Application Serial No. 08/670,757
and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	Priority Claimed		
07-155762 (Number)	Japan (Country)	June 22, 1995 (Day/Month/Year Filed)	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:








(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)

(Continued on Page 2)

I hereby appoint as principal attorneys; Donald R. Antonelli, Reg. No. 20,296; David T. Terry, Reg. No. 20,178; Melvin Kraus, Reg. No. 22,466; Stanley A. Wal, Reg. No. 26,432; William I. Solomon, Reg. No. 28,565; Gregory E. Montone, Reg. No. 28,141; Ronald J. Shore, Reg. No. 28,577; Donald E. Stout, Reg. No. 26,422; Alan E. Schiavelli, Reg. No. 32,087; James N. Dresser, Reg. No. 22,973 and Carl I. Brundidge, Reg. No. 29,621 to prosecute and transact all business connected with this application and any related United States application and international applications. Please direct all communications to the following address:

Antonelli, Terry, Stout & Kraus
Suite 1800
1300 North Seventeenth Street
Arlington, Virginia 22209
Telephone: (703) 312-6600
Fax: (703) 312-6666

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United State Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(Full Name)	(Signature)
Date September 2, 1996 Inventor Hideki Murayama	
Residence Kunitachi-shi, Japan	Citizenship Japan
Post Office Address 14-23, Naka 1-chome, Kunitachi-shi, Tokyo, Japan	
Date September 2, 1996 Inventor Hiroshi Yashiro	
Residence Kawasaki-shi, Japan	Citizenship Japan
Post Office Address 4-7-25-406, Miyauchi, Nakahara-ku, Kawasaki-shi, Kanagawa-ken, Japan	
Date September 2, 1996 Inventor Satoshi Yoshizawa	
Residence Musashino-shi, Japan	Citizenship Japan
Post Office Address 2-28-28-305, Kyonan-cho, Musashino-shi, Tokyo, Japan	
Date September 2, 1996 Inventor Kazuo Horikawa	
Residence Yokohama-shi, Japan	Citizenship Japan
Post Office Address 546-9, Shinano-cho, Totsuka-ku, Yokohama-shi, Kanagawa-ken, Japan	
Date September 2, 1996 Inventor Takehisa Hayashi	
Residence Sagamihara-shi, Japan	Citizenship Japan
Post Office Address 5-10-36, Aihara, Sagamihara-shi, Kanagawa-ken, Japan	
Date September 2, 1996 Inventor Hiroshi Iwamoto	
Residence Hadano-shi, Japan	Citizenship Japan
Post Office Address 504-18, Tokawa, Hadano-shi, Kanagawa-ken, Japan	
Date September 2, 1996 Inventor Kimitoshi Yamada	
Residence Hadano-shi, Japan	Citizenship Japan
Post Office Address 2-4-14, Soya, Hadano-shi, Kanagawa-ken, Japan	
Date _____ Inventor _____	
Residence _____	Citizenship _____
Post Office Address _____	
Date _____ Inventor _____	
Residence _____	Citizenship _____
Post Office Address _____	
Date _____ Inventor _____	
Residence _____	Citizenship _____
Post Office Address _____	